


Devices

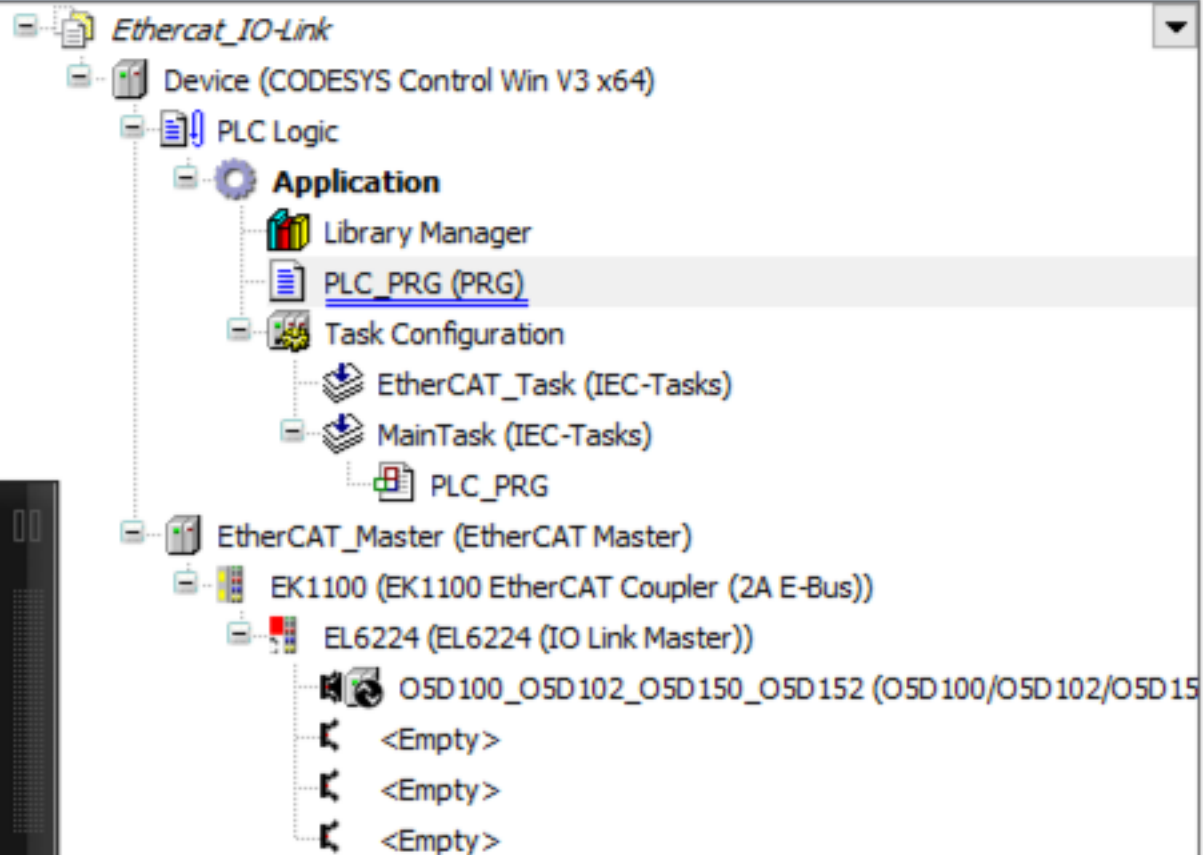

EL6224 EtherCAT_Master <Empty> O5D100_O5D102_O5D150_O5D152

```
1 PROGRAM PLC_PRG
2 VAR
3     Distance:UINT; // Hier müssen wir nicht die 4 Bit schieben
4
5
6     ioread : ETC_ADS_IoLinkRead;
7     abyDataBuffer : ARRAY[0..254] OF BYTE;
8
9
10
11
12 END_VAR
```

```
1
2 Distance;
3
4
5 ioread.xExecute := TRUE;
6 ioread.usiCom := 1;
7 ioread.uiDevice := 1002;
8 ioread.usiChannel := 1;
9 ioread.udiTimeout := 20000;
10 ioread.usiPort := 1;
11 ioread.uiIndex := 16;
12 ioread.usiSubIndex := 0;
13 ioread.udiSize := 255;
14 ioread.pbyData := ADR(abyDataBuffer[0]);
15 ioread();
```